

MISCELLANEOUS

Master Format #: 03 35 00

EUCOBAR

EVAPORATION RETARDANT AND FINISHING AID



EUCLID CHEMICAL

PACKAGING

- 5 gal (18.9 L) pail
Code: 028 05
- 55 gal (208 L) drum
Code: 028 55
- 1 gal (3.8 L) jugs, 6 per case
Code: 028 95

CLEAN UP

Clean spray equipment with soap and water.

SHELF LIFE

2 years in original, unopened package

DESCRIPTION

EUCOBAR is designed to be used as an evaporation retardant and finishing aid on concrete surfaces of all types. When sprayed over fresh concrete, EUCOBAR forms a monomolecular film that prevents rapid moisture loss from the concrete surface. It is easy to use requiring only the addition of water before spray application. EUCOBAR is especially effective when concreting operations must be performed in direct sun, wind, high temperatures, or low relative humidity.

PRODUCT CHARACTERISTICS

FEATURES/BENEFITS

- Holds in surface moisture on concrete floors, slabs, and repairs
- Helps prevent plastic shrinkage cracking
- Easy and economical to use
- Helps eliminate crusting caused by loss of surface moisture
- Water based for total compatibility with fresh concrete
- Can be used on silica fume/microsilica modified concrete mixes and other mixes containing little to no bleed water.
- Excellent for both interior and exterior concrete projects
- Will not affect adhesion of curing compound or other treatments
- VOC Content: 11 g/L

PRIMARY APPLICATIONS

- Floors
- Pavements
- Concrete toppings
- Vertical/overhead repairs
- Dry shake floors including all SURFLEX and EUCCO-PLATE formulations
- Specialty iron toppings
- Parking decks and ramps

APPEARANCE

EUCOBAR is a free flowing pink liquid designed to be mixed with water. The use of EUCOBAR will not affect the color of concrete.

COVERAGE

Dilution Rate: 9:1 (Water:EUCOBAR)

EUCOBAR (after dilution) will cover approximately 200 to 400 ft²/gal (5 to 10 m²/L). Coverage will vary depending on concrete texture and wind conditions. For estimating purposes, 1 gal (3.8 L) of EUCOBAR concentrate will treat 2,000 to 4,000 ft² (186 to 372 m²) of concrete surface area, but is highly dependent upon ambient conditions.

TECHNICAL INFORMATION

EUCOBAR is a water based polymer concentrate that is readily dilutable in water.

Evaporation rate is a function of relative humidity, concrete temperature, air temperature and wind velocity. Plastic shrinkage cracking is a strong possibility when the rate of evaporation exceeds 0.2 lb/ft²/hr (1.0 kg/m²/hr). The chart on the back of this page (Fig. 2.1.5 of ACI 305, Hot Weather Concreting) is useful in determining the evaporation rate under a given set of jobsite conditions. Use EUCOBAR when the above limit is exceeded.

DIRECTIONS FOR USE

Surface Preparation: EUCOBAR is applied directly to the surface of fresh concrete. No surface preparation is necessary.

Mixing: EUCOBAR is supplied as a concentrate and must be diluted with water at a 9:1 (water:EUCOBAR) ratio. Determine capacity of sprayer and divide by 10. Add this amount of EUCOBAR to the sprayer canister followed by 9 times that amount of water. For example, if 1 quart (0.95 L) of EUCOBAR is added, dilute with 9 quarts (8.5 L) of water. Mix or shake until thoroughly blended.

Placement: Apply using a tank type, hand pump sprayer capable of spraying in a fine mist. Use a slotted tip for the best spray. Spray EUCOBAR over the fresh concrete surface as soon as possible after floating. A pink, translucent sheen will appear as the surface is treated. On extreme drying conditions, additional applications may be given as needed. When used on floors with dry shake hardener applications, EUCOBAR may be used on the fresh concrete as well as between each shake application.

Curing & Sealing: Proper curing procedures are important to ensure the durability and quality of concrete. To prevent surface cracking, cure flatwork with a high solids cure and seal or other industry-approved curing method.

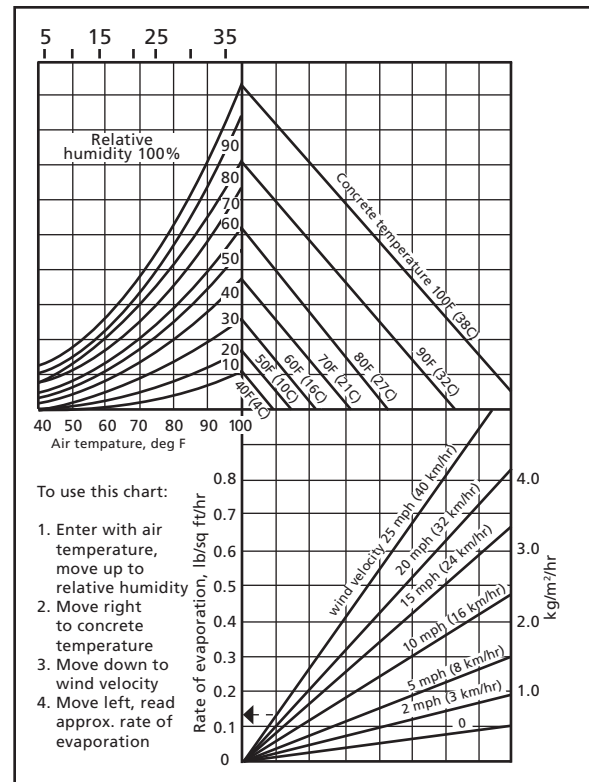


Fig. 2.1.5, ACI 305, Hot Weather Concreting

PRECAUTIONS/LIMITATIONS

- Use with proper dilution rate.
- This product is not a surface retarder for doing exposed aggregate concrete.
- Do not apply Eucobar as a final finishing aid.
- Do not immediately work Eucobar into the surface of concrete or cementitious repair products.
- Do not use as a curing compound.
- Apply only as a fine spray.
- Do not allow to freeze.
- In all cases, consult the Safety Data Sheet before use.

Rev. 08.23

WARRANTY: The Euclid Chemical Company ("Euclid") solely and expressly warrants that its products shall be free from defects in materials and workmanship for one (1) year from the date of purchase. Unless authorized in writing by an officer of Euclid, no other representations or statements made by Euclid or its representatives, in writing or orally, shall alter this warranty. EUCLID MAKES NO WARRANTIES, IMPLIED OR OTHERWISE, AS TO THE MERCHANTABILITY OR FITNESS FOR ORDINARY OR PARTICULAR PURPOSES OF ITS PRODUCTS AND EXCLUDES THE SAME. If any Euclid product fails to conform with this warranty, Euclid will replace the product at no cost to Buyer. Replacement of any product shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within one (1) year from the date of the claimed breach. Euclid does not authorize anyone on its behalf to make any written or oral statements which in any way alter Euclid's installation information or instructions in its product literature or on its packaging labels. Any installation of Euclid products which fails to conform with such installation information or instructions shall void this warranty. Product demonstrations, if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of Euclid's products for the Buyer's intended purposes.